

HIGH CUT LEVEL, VERY FLEXIBLE IMPACT GLOVE

Ultra dexterous impact glove with a high level of cut protection so you can focus on work, not your gloves.

FEATURES

- › Cut resistance: level F / ANSI A6
- › Water repellent thin synthetic leather palm with high cut resistance fabric on palm feel like a classic mechanic's glove
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb & back of hand
- › Ergonomically designed TPR and curved fingers follow the hand movement reducing hand fatigue
- › Reinforced thumb crotch to prolong wear
- › Adjustable cuff with elastic for a custom fit
- › ANSI Level 2 impact protection
- › Contact heat resistant up to 100°C/212°F



SUITABLE FOR






Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

CAT II EN 388:2016 EN 407:2004 ANSI/ISEA 105

 2X43FP
  X1XXXX
  A6 4 3
  ANSI / ISEA 138 2

See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	Polyester Fabric Laminated Spandex with TPR
	COATING:	Synthetic leather and knitted cut resistant fabric
COLOUR	Red/Yellow	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist with Velcro® strap	


ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	SKG00024CF	10 pairs per bag
9/L	SKG00024CH	
10/XL	SKG00024CJ	60 pairs per case
11/XXL	SKG00024CL	
12/XXXL	SKG00024CN	
13/XXXXL	SKG00024CP	


RECOMMENDATIONS FOR USE

- USE: General handling glove with cut and impact protection. Not suitable for high thermal (beyond 100°C / 212°F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS

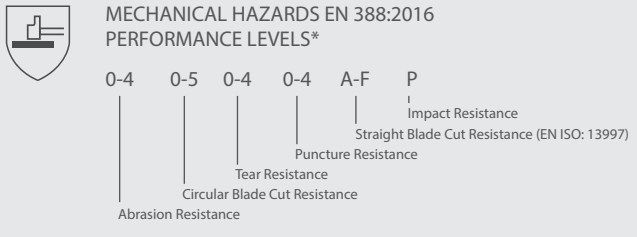

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

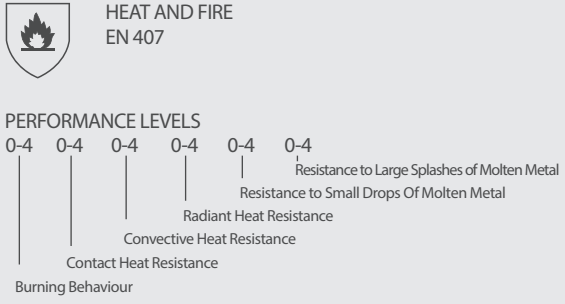

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

CLASSIFICATION FOR IMPACT RESISTANCE		
Performance level	Mean (kJ)	All Impacts (kJ)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

GLOBUS

EUROPE
www.globusgroup.com
E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA
www.globusgroup.com/gcc
E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS
www.globusgroup.com
E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA